




BEE VALVE INC.



Strainers

Specializing in Fluid Handling Components

Bee Valve Strainers



T-Line Strainers

1/2", 3/4", 1"

- Polypropylene body
- 304 stainless steel screens
- EPDM gaskets standard
- 20, 40, & 80 mesh screens
- Operating pressure: 100 psi max @ 70°F



Standard Y-Strainers

1/2", 3/4", 1", 1-1/4", 1-1/2", 2"

- Glass-reinforced polypropylene body & cap
- 304 stainless steel screens
- 20 mesh screen standard (12 thru 100 mesh available)
- EPDM gaskets standard
- Easy access for cleaning
- Operating pressure: 90 psi max @ 70°F



1-1/2", 2" High Capacity Y-Strainers

- Glass-reinforced polypropylene body & cap
- 5" long full-flow 316 stainless steel screens
- 14, 20, 40, 80, & 100 mesh screens available
- Easy access for cleaning
- EPDM gaskets standard
- Viton® O-ring seals
- Operating pressure: 100 psi max @ 70°F



3" High Capacity Y-Strainers

- Heavy duty, glass-reinforced polypropylene
- Extra large 304 stainless steel screens-reinforced with polypropylene
- 6, 12, 20, 40, & 80 mesh screens available
- EPDM gaskets standard
- 1/2" drain plug in bottom of cap
- Operating pressure: 75 psi max @ 70°F



2" Quick Clean, High Capacity Y-Strainers

- Heavy duty glass-reinforced polypropylene
- 3" cam lever cap for easy cleaning
- 316 stainless steel screen
- 8" long full-flow screen
- 6, 14, 30, 40, & 80 mesh screens available
- Viton® O-ring
- EPDM gaskets standard
- Operating pressure: 100 psi max @ 70°F




3" Quick Clean, High Capacity Y-Strainers

- 4" Heavy duty polypropylene dust cap with three stainless steel handles
- Easy cleaning
- Heavy duty, glass-reinforced polypropylene body
- 316 Stainless steel screens - available in 1/16" or 1/8" perf
- EPDM gaskets standard
- Operating pressure: 75 psi max @ 70°F



Screens

Replacement screens are available for all Bee Valve strainers. Reference BeeValve.com for size and part numbers.

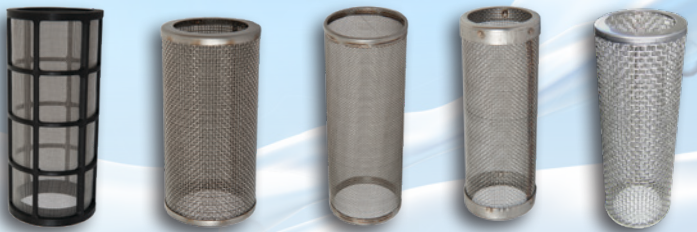

Suction Strainers

Round-Hole Zinc-Plated Steel Strainers


- Spot-welded strong 16 gauge steel
- Zinc plated
- NPT connection
- 50% strainer passage area
- Available in 1-1/2" and 2" connections
- Other sizes and configurations available-inquire



Slotted Polyethylene Strainers

- Strong, high-density polyethylene
- Lightweight
- Available in three standard sizes: 1-1/2", 2" & 3"
- NPT connection
- Large open area-high capacity
- Long life, won't rust
- Versatile, can be used in salt water and with most acids and chemicals





BEE VALVE INC.
Specializing in Fluid Handling Components

HOME ABOUT US EVENTS NEWS BLOG LITERATURE TECHNICAL INFO WARRANTY INFO CONTACT US

Couplers & Adapters
PVC couplers/adapters are chemical resistant to most acids.

Shop Now

Online Catalog

- Ball Valves
- Strainers
- Couplers & Adapters
- Fittings, Pipe & Hose
- Tank Fittings & Accessories
- Sprayer Components
- Gaskets
- Clamps
- Gauges
- Flare, Hose & Hose Fittings
- Push-In Tube Fittings
- Quick Coupling Connectors
- Replacement Parts

